


Detail Issued For Guidance Only,
Designer's Approval Required


☑ Ensure surfaces are clean & dry.
Prime steel column using Visqueen
HP Tanking Primer.

☑ Seal around column using
Visqueen Self Adhesive Membrane.
Ensure all laps are fully sealed
(150mm minimum).

STEP 1 :-
ENSURE HOLDING DOWN BOLTS ARE
COVERED IN SHUTTERED CONCRETE

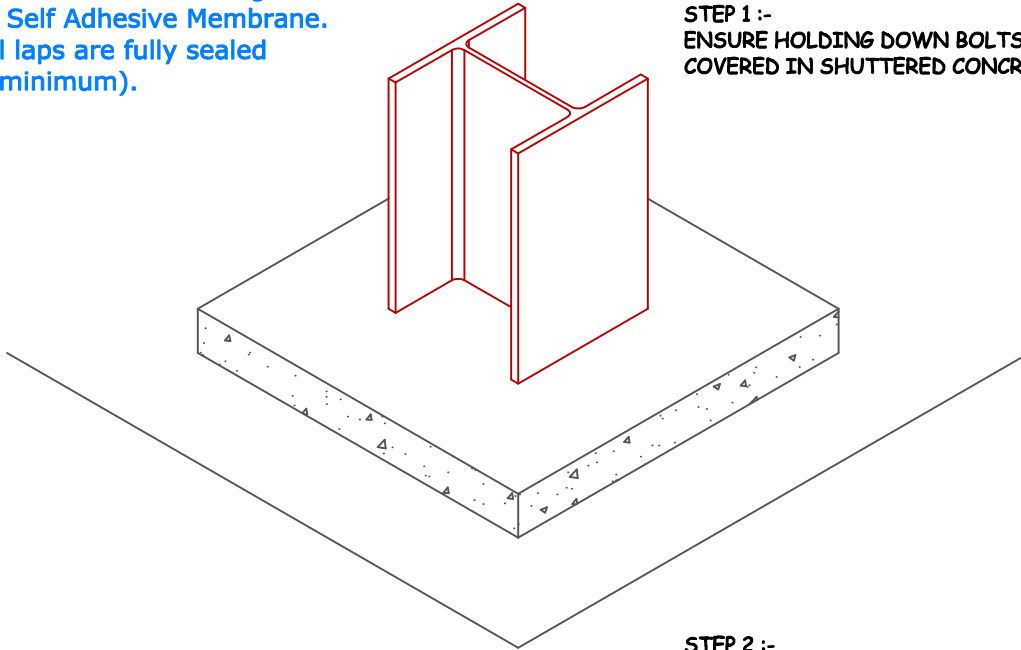

STEP 2 :-
APPLY VISQUEEN SAM OVER
PRIMED STEELWORK / CONCRETE
ENSURE ALL LAPS ARE FULLY SEALED
IN ALL DIRECTIONS (150mm MIN).

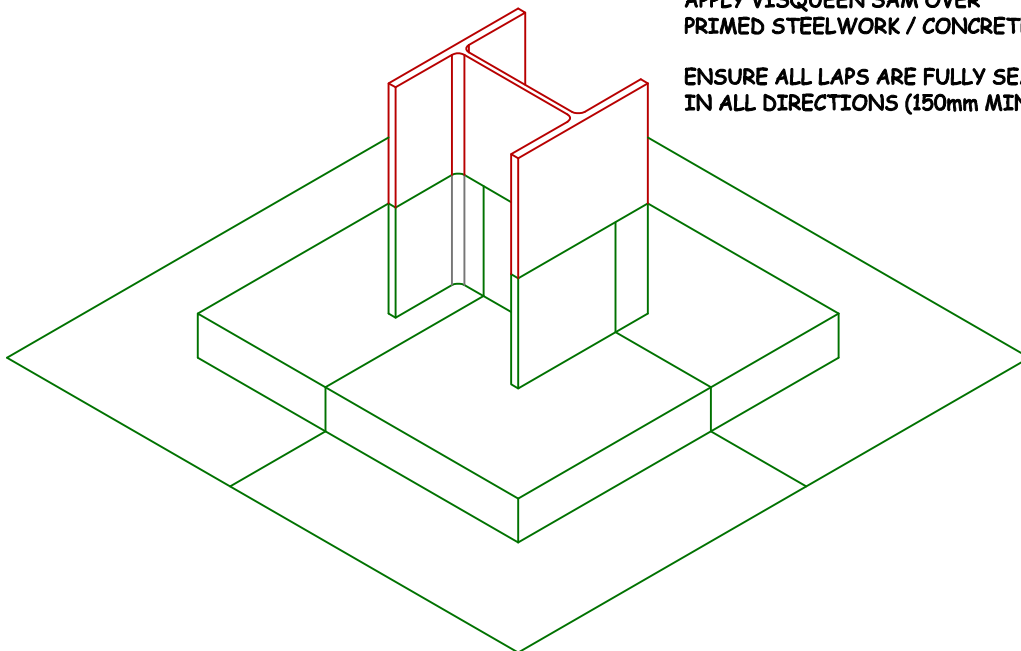

NB; DO NOT SCALE - USE FIGURED DIMENSIONS ONLY.

VISQUEEN

**STRUCTURAL
WATERPROOFING**

Visqueen Building Products
Contact Technical Support :
t : 0333 202 6800
f : 0333 202 6886
e : enquiries@visqueenbuilding.co.uk
www.visqueenbuilding.co.uk

Project: Standard Detail : Typical Steel Column Sealing Detail.

Drg No.- SW-55.

Date.- 02/15.

Scale.- NTS.

© COPYRIGHT
RESERVED.