


# Zedex CPT High Performance DPC

## CE Mark to Damp Proof Course EN 14909

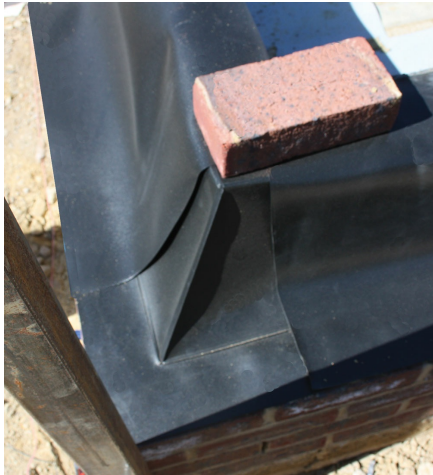

- Outperforms all other high performance flexible DPCs
- Contains no hazardous pitch or PVC plasticizers
- Excellent tear resistance under high compressive loads
- Low permeability to Radon and Carbon Dioxide gases
- BBA Certificate No.94/3059

### Description

Visqueen Zedex CPT High Performance Damp Proof Course (DPC) and cavity tray system is manufactured from co-polymer thermoplastic (CPT) providing all the characteristics necessary for it to perform effectively for the lifetime of the building in which it is incorporated. Visqueen Zedex CPT DPC provides superior strength, tear resistance and flexibility and is compatible with all other Visqueen damp proofing, gas proofing and tanking protection systems.

### Application

Visqueen Zedex CPT DPC is suitable for use as a DPC in all types of building construction and can be used in vertical, horizontal, stepped and cavity tray applications.

### On Site

High tear and puncture resistant characteristics help avoid the failures caused by damage during installation, such as clearing mortar droppings out of the cavity, general manhandling on site and during transport. Independent testing shows the tear strength of Visqueen Zedex CPT DPC to be many times that of traditional pitch polymer DPCs.

### Aesthetics

Visqueen Zedex CPT DPC is also available in a range of colours, subject to minimum order quantities and lead times, to match the mortar or outer leaf. The most popular colours are white and sandstone. Our technical department will be happy to assist you with product specifications.

### Mortar adhesion

Visqueen Building Products commissioned Ceram Building Technology to test Visqueen Zedex CPT DPC under BSI's DD86 Part 1 1983 for flexural bond strength and shear strength. These independent tests show that Visqueen Zedex CPT DPC has excellent mortar adhesion characteristics. With DPCs being used extensively outside the original ground level applications, understanding the effect of a damp proof course on wall strength becomes increasingly important.

### Compatibility

Visqueen Zedex CPT DPC avoids the risks of any incompatibility between the damp proof course and other damp or waterproofing materials. It can be used with a wide range of products such as silicon mastics without causing discolouration, and bituminous liquid DPMs. Such compatibility is essential to ensure a continuous waterproof barrier for the lifetime of the building. Clean and safe to handle, the materials used in Visqueen Zedex CPT DPC are chemically stable and inert, free of both solvents and aggressive chemicals. Visqueen Zedex CPT DPC is also clean and safe to use, requiring no special conditions for storage, transportation, handling, usage or recycling.

- Fully recyclable.
- Strong and flexible.
- Robust and puncture resistant.
- High tear strength.
- Excellent workability in winter conditions.

**VISQUEEN**



## Zedex CPT High Performance DPC CE Mark to Damp Proof Course EN 14909

Page 2

### Installation steps

- Visqueen Zedex CPT DPC must extend through the full thickness of the wall, including pointing, applied rendering or other facing materials.
- Visqueen Zedex CPT DPC must be laid on an even bed of wet mortar, and perforations in adjacent courses of brickwork must be completely filled with mortar.
- Visqueen Zedex CPT DPC must not be damaged by cavity cleaning after installation.
- Further information is available from BBA Certificate (94/3059), available from our website at [visqueen.com](http://visqueen.com)

### Jointing

All DPC laps must be a minimum of 100mm and bonded together with Visqueen Zedex DPC Jointing Tape.

All cavity tray laps to Preformed Cavity Tray (Cloak) Units must be a minimum of 100mm and bonded using Visqueen Zedex DPC Jointing Tape. Visqueen Zedex DPC Joint Support Boards are also available to support the formation and long term integrity of these joints.

### Surface fixing

Visqueen Zedex DPC Fixing Strip should be used when the construction programme or the design requires the DPC to be post or surface fixed to the cavity face of the inner leaf. The surface should first be primed; the DPC then bonded to the inner leaf using Visqueen Zedex DPC Jointing Tape and finally permanently secured using Visqueen Zedex DPC Fixing Pins at 150mm intervals.

Visqueen Zedex DPC Fixing Pins for Masonry can be used for surface fixing to solid substrates such as blockwork or concrete whereas the rigid urethane foam insulation of composite inner leafs require Visqueen Zedex DPC Fixing Pins for Insulation

### Technical Data and CE Mark

Visqueen Zedex CPT Damp Proof Course complies with the requirements and clauses of EN 14909 - Flexible sheets for waterproofing - Plastic and rubber damp proof courses - Definitions and characteristics.

Visqueen Zedex CPT DPC products are manufactured under a Quality Management System (ISO 9001) - Certificate of Compliance reference no. 4560-3 by Knight International applies.



# Zedex CPT High Performance DPC

## CE Mark to Damp Proof Course EN 14909

### Product Data

#### Product Data

Characteristic	Test method	Units	Compliance criteria	Value or Statement
Visible defects	EN 1850 -2	-	Pass/Fail	Pass
Length	EN 1848-2	m	-2.5%/+2.5%	20
Width	EN 1848-2	mm	-5%/+5%	100 to 1450
Straightness	EN 1848-2	-	Pass/Fail	Pass
Thickness	EN 1849-2	micron	-10%/+10%	800
Grammage (Mass per unit area)	EN 1849-2	g/m <sup>2</sup>	-10%/+10%	750
Joint Strength	EN12317-2	N	>MLV	220
Watertightness 2kPa	EN 1928	-	Pass/Fail	Pass
Tensile Strength (MD)	EN 12311-2	MPa	>MLV	17
Tensile Strength (TD)	EN 12311-2	MPa	>MLV	14
Elongation (MD)	EN 12311-2	%	>MLV	500
Elongation (TD)	EN 12311-2	%	>MLV	500
Resistance to impact	EN 12691	mm	>MLV	400
Resistance to low temperatures	EN 495-5	-40oC	MDV	Pass
Flexibility at temperatures	EN1109	-15oC	Pass/Fail	Pass
Foldability	EN 495-5	-40oC	Pass/Fail	Pass
Durability (artificial ageing)	EN 1296 and EN 1928	-	Pass/Fail	Pass
Durability Chemical Resistance	EN 1847	-	Pass/Fail	Pass
Durability against alkali - Annex C	EN 14909	-	Pass/Fail	Pass
Resistance to tearing (nail shank) MD	EN 12310-1	N	MDV	350
Resistance to tearing (nail shank) TD	EN 12310-1	N	MDV	365
Resistance to static loading	EN 12730	Kg	>MLV	Pass-20
Water vapour transmission - resistance	EN 1931	MNs/g	MDV	372
Water vapour transmission - permeability	EN 1931	g/m <sup>2</sup> /d	MDV	0.4
Radon permeability	SP Method no. 3873.	m <sup>2</sup> /s	MDV	8.30E-12
Carbon Dioxide Permeability	ISO 2782:1995	m <sup>2</sup> /sec/Pa	MDV	1.58E-16
Reaction to Fire	EN 13501-1	Class	MDV	F



# Zedex CPT High Performance DPC CE Mark to Damp Proof Course EN 14909

## Appendix A

### About Visqueen

Visqueen is the market leader in the manufacture and supply of structural waterproofing and gas protection systems. Visqueen offers the complete package – a proven, reliable range backed by a technical support service that goes unmatched in the market - everything you would expect from a reputable and ethical company.

### Complete Range, Complete Solution

- [Structural Waterproofing](#)
- [Damp Proof Course](#)
- [Damp Proof Membranes](#)
- [Gas Protection and Gas Venting](#)
- [Vapour Control Layers](#)
- [Stormwater Protection](#)

### Download Library

- [Technical Datasheet](#)
- [Standard Details](#)
- [Technical Service](#)
- [Visqueen Gas Protection Brochure](#)
- [NBS Clauses](#)
- [BBA Certificates](#)
- [Material Safety Datasheets](#)
- [Specification Guide](#)

### Find your local stockist

Search our directory of Visqueen specification [Specialist Centres](#) to locate your nearest Visqueen Partner.

### Technical support throughout your project

We are specialists in our field and can help you specify the correct solutions with the necessary performance levels, in accordance with building regulations.

- Nationwide site support team
- Specification advice
- Installation guidance & project sign off
- System design including CAD details

### CPD Seminars and Training Academy



#### Gas Protection CPD

The specification, technical design, and installation of gas protection systems, enabling the sustainable regeneration of brownfield sites.



#### Structural Waterproofing CPD

The specification, technical design, and installation of structural waterproofing systems for protection against water and damp ingress in both above and below ground projects.



#### Visqueen Training Academy

We are now able to offer exclusive in depth training opportunities on a wide variety of Visqueen products at our Training Academy.



#### Visqueen Special Projects

We provide high-level expertise, comprehensive support and experience in all types of waterproofing and gas protection.

**VISQUEEN**

Part of RPC bpi group

Heanor Gate Road, Heanor, Derbyshire, DE75 7RG

0333 202 6800 [enquiries@visqueen.com](mailto:enquiries@visqueen.com) [www.visqueen.com](http://www.visqueen.com)

The information given in this datasheet is based on data and knowledge correct at the time of printing. Statements made are of a general nature and are not intended to apply to any use or application outside any referred to in the datasheet. As conditions of usage and installation are beyond our control we do not warrant performance obtained but strongly recommend that our installation guidelines and the relevant British Standard Codes of Practice are adhered to. Please contact us if you are in any doubt as to the suitability of application.

