


Vapour Barrier

CE Mark to EN 13984

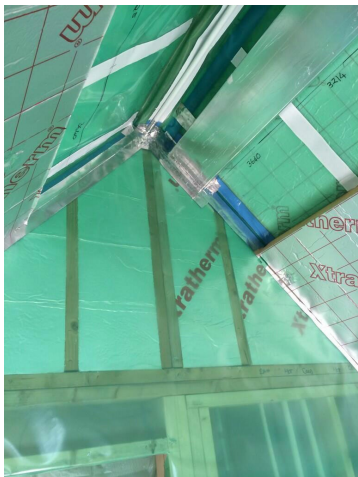

- Range suitable for all internal building conditions
- Used within roof, wall and floor constructions
- Manufactured in the UK
- Vapour resistance of greater than 530 MNs/g
- Supplied in single wound sheeting which reduces the risk of cracks in screed

Description

Visqueen Vapour Barrier is used to omit the risk of interstitial condensation within a structure as well as improving the general airtightness of the building. Visqueen Vapour Barrier restricts the passage of warm, moist air from within the building from permeating into the structure or the roof. It is commonly used within timber frame housing as well as commercial buildings. Visqueen Vapour Barrier is manufactured using virgin polyethylene.

Application

The control of condensation to within safe limits is an important consideration in the design and construction of buildings. The occupants of a building and their associated activities produce water vapour which, if unmanaged, can condense within or between building elements; a process referred to as interstitial condensation. This condensation can have serious detrimental effects upon the fabric of the building such as causing the decay of timber elements and corrosion of metal components, and reducing the thermal effectiveness of insulating materials. With the progressive increases in thermal efficiencies of buildings in order to reduce energy usage, any reduction in the effectiveness of the installed insulation can have long term financial implications. The negative effect upon the fabric of the building increases the incidence of moulds and mildews, which in turn can have a harmful effect upon the health of the building occupants.

Visqueen Vapour Barrier provides a means of protecting the warm side of the thermal insulation incorporated in a building by creating a barrier to the movement of warm, moist air. Visqueen Vapour Barrier is a loose laid membrane designed for use in roofs, walls and floors subjected to humidity levels less than 60% at 20 degrees Celsius (BS5250: 2002 class 2 and 3 conditions) e.g. offices and domestic dwellings with low occupancy.

System Components

To ensure airtightness the following high performance components complete the Visqueen's vapour control system.

[Please click here for datasheet and installation instructions](#)

- Visqueen Pro Double Sided Vapour Jointing Tape
- Visqueen Pro Single Sided Vapour Jointing Tape
- Visqueen Pro Vapour Edge (Flashing) Tape

Installation

Fixing

Visqueen Vapour Control Layers should be installed in accordance with the recommendations of BS5250: 2002 'Code of practice for control of condensation in buildings'. Visqueen Vapour Barrier should be installed on the "warm" side of the insulated structure, with special care being taken to ensure that all seams and holes are sealed effectively - thus rendering the whole structure moisture and vapour proof and improving thermal performance. It is important that Visqueen Vapour barrier should be continuous in order to prevent vapour entering the wall or the roof.

VISQUEEN



Jointing Tapes

To review our high performance tapes and installation instructions please [click here](#).

Ensure all surfaces are clean, smooth and dry prior to the application of Visqueen Pro Vapour Tapes. Surfaces do not require priming prior to tape application.

Before fixing the VCL membrane to a timber frame, all studs including vertical/horizontal studs, head and sole plate; Visqueen Pro Double Sided Jointing tape must be applied.

For total protection, all joints in the Vapour Barrier should be lapped by a minimum of 75mm, and sealed with Visqueen Vapour Tape applied equidistant over the lap. To aid formation, laps should be made over a solid substrate.

For protecting and sealing the perimeter, Visqueen Vapour Edge Tape should be used. Where perimeter detailing involves sealing to masonry units such as brickwork, blockwork, etc ensure vapour proof continuity by sealing with Visqueen Vapour Edge Tape applied equidistant over the junction.

Visqueen Vapour tapes are coated with a special cold weather acrylic pressure sensitive adhesive system which combines superior quick stick at normal temperatures with superior low temperature performance below freezing. The tapes are highly puncture and tear resistant.

Failure to suitably connect the vapour control layer to other building elements will seriously reduce performance.

Additional System Components

Visqueen Preformed Top Hat unit –preformed unit for sealing around service pipe penetrations.


Precautions

Visqueen Vapour Control Layers are classified as non-hazardous when used in accordance with BS5250: 2002. Care should be taken to avoid accidental damage when handling the membranes on site. Membrane installation is not recommended below 5oC. Visqueen Vapour Control Layers are not intended for use where they will be exposed for long periods of outdoor weathering.

When the Vapour Barrier is to be installed near a light fitting please consult with Building Control or the Architect on the suitability of the product. Material softening point is declared in our technical data.

Technical Data and CE Mark

Visqueen Vapour Barrier complies with the requirements and clauses of EN 13984 - Flexible sheets for waterproofing - Plastic and rubber vapour control layers - Definitions and characteristics.



Vapour Barrier
 CE Mark to EN 13984

Product Data

Product Data

heading	Characteristic	Test method	Units	Compliance criteria	Value or Statement
	Visible defects	EN 1850 -2	-	Pass/Fail	Pass
	Length	EN 1848-2	m	-0%/+10%	50
	Width	EN 1848-2	m	-2.5%/+2.5%	2
	Thickness	EN 1849-2	mm	-12.5%/+12.5%	0.3
	Mass	EN 1849-2	g/m ²	-12.5%/+12.5%	270
	Tensile Strength - MD	EN EN12311	N/mm ²	>MLV	20
	Tensile Strength - CD	EN EN12311	N/mm ²	>MLV	19
	Tensile Elongation - MD	EN EN12311	%	>MLV	560
	Tensile Elongation - CD	EN EN12311	%	>MLV	697
	Joint Strength	EN12317-2	N	>MLV	219
	Watertightness 2kPa	EN 1928	-	Pass/Fail	Pass
	Resistance to impact	EN 12691	mm	>MLV	250
	Durability (artificial ageing)	EN 1296 and EN 1928	-	Pass/Fail	Pass
	Durability Chemical Resistance	EN 1847	-	Pass/Fail	Pass
	Resistance to tearing (nail shank) CD	EN 12310-1	N	MDV	185
	Resistance to tearing (nail shank) MD	EN 12310-1	N	MDV	185
	Flexibility at low temperature	EN 1109	-15oC	MDV	Pass
	Water vapour transmission - resistance	EN 1931	MNs/g	MDV	633
	Water vapour transmission - permeability	EN 1931	g/m ² /d	MDV	0.21



Vapour Barrier CE Mark to EN 13984

Appendix A

About Visqueen

Visqueen is the market leader in the manufacture and supply of structural waterproofing and gas protection systems. Visqueen offers the complete package – a proven, reliable range backed by a technical support service that goes unmatched in the market - everything you would expect from a reputable and ethical company.

Complete Range, Complete Solution

- Structural Waterproofing
- Damp Proof Course
- Damp Proof Membranes
- Gas Protection and Gas Venting
- Vapour Control Layers
- Stormwater Protection

Download Library

- Technical Datasheet
- Standard Details
- Technical Service
- Visqueen Gas Protection Brochure
- NBS Clauses
- BBA Certificates
- Material Safety Datasheets
- Specification Guide

Find your local stockist

Search our directory of Visqueen specification [Specialist Centres](#) to locate your nearest Visqueen Partner.

Technical support throughout your project

We are specialists in our field and can help you specify the correct solutions with the necessary performance levels, in accordance with building regulations.

- Nationwide site support team
- Specification advice
- Installation guidance & project sign off
- System design including CAD details

CPD Seminars and Training Academy



Gas Protection CPD

The specification, technical design, and installation of gas protection systems, enabling the sustainable regeneration of brownfield sites.



Structural Waterproofing CPD

The specification, technical design, and installation of structural waterproofing systems for protection against water and damp ingress in both above and below ground projects.



Visqueen Training Academy

We are now able to offer exclusive in depth training opportunities on a wide variety of Visqueen products at our Training Academy.



Visqueen Special Projects

We provide high-level expertise, comprehensive support and experience in all types of waterproofing and gas protection.

VISQUEEN

Part of RPC bpi group

Heanor Gate Road, Heanor, Derbyshire, DE75 7RG

0333 202 6800 enquiries@visqueen.com www.visqueen.com

The information given in this datasheet is based on data and knowledge correct at the time of printing. Statements made are of a general nature and are not intended to apply to any use or application outside any referred to in the datasheet. As conditions of usage and installation are beyond our control we do not warrant performance obtained but strongly recommend that our installation guidelines and the relevant British Standard Codes of Practice are adhered to. Please contact us if you are in any doubt as to the suitability of application.

